

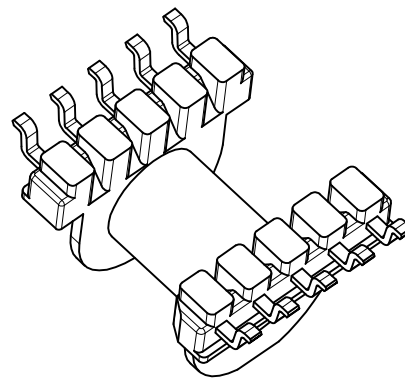

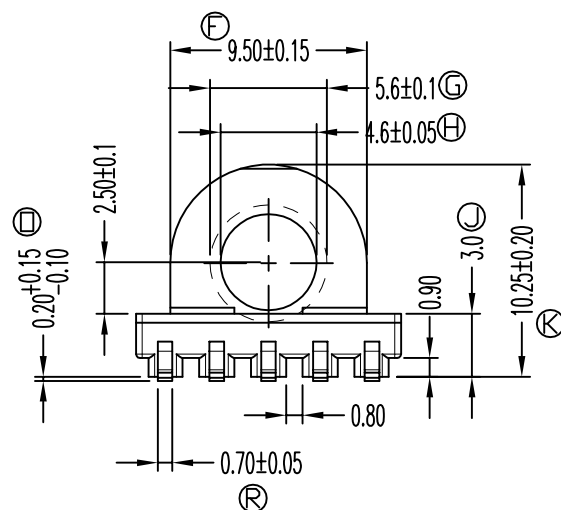


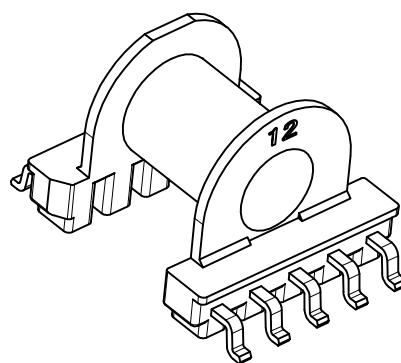

NOTE:

- 1, 焊前拉力要求: 1.0Kg Min;
- 2, 焊锡温度380~400度, 时间: 1~2S;
- 3, PIN切面上锡面积需达95%以上;
- 4, 焊后拉拔力要求: 每PCS单PIN0.6KG/MIN 及全PIN, 平均值1.0KG.

REV	DATE	REVISIONS REC

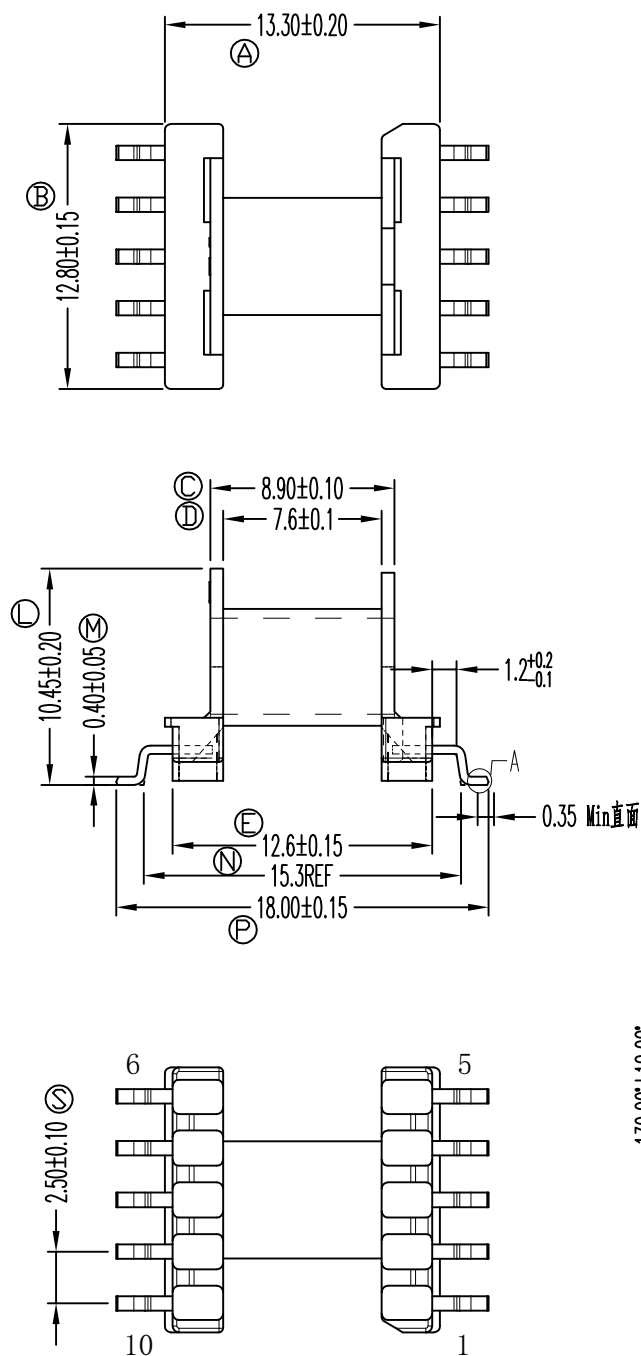


东莞市福讯达塑胶制品有限公司

DONGGUAN FU XUN DA PLASTICS PRODUCTS CO., LTD

地址: 东莞市横沥镇三江工业区116栋

TEL: 0769-82218739 82218769 FAX: 0769-82218929

DRAFTER	ZHANG SHAO YONG	TOLERANCE	DATE:
CHECK	CHEN YONG LONG	$0 < L \leq 4$ ± 0.1	2024.03.24
APPROVED	ZHU DONG SHENG	$4 < L \leq 16$ ± 0.2	
		$16 < L \leq 50$ ± 0.3	
		PIN PITCH ± 0.2	



DRAWING TITLE:	TERMINAL DIMENTION:	ANGLE:
EP13	----	$\pm 1^\circ$
MODE NAME:	TERMINAL MATERIAL:	UNIT:
FX-1332-1	PB WIRE	mm
SPECIFICATION:	UL RATING:	SCALE:
5+5 PIN	94V-0	1 : 1
BOBBING MATERIAL:	PULLING STRENGTH:	REV:
PM9630	1.0Kg/MIN	A/0